

Каталог на продукцию компании Krisch

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727)345-47-04

Беларусь +(375)257-127-88

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47

Эл.почта: khd@nt-rt.ru || сайт: <https://kirsch.nt-rt.ru/>

Constant temperatures and optimum storage safety


Temperature stability is a decisive factor in the safe storage of sensitive chilled goods. Thanks to perfectly matched components, our products offer the best cooling conditions and the most accurate temperature control in the world. This is achieved by our newly developed PRO-ACTIVE controller with two standard built-in PT-1000 sensors. Temperature deviations in the interior can therefore be minimised to just 1.5 °C from the warmest to the coldest point (confirmed by a DIN measurement, available for models BL, MED, LABO and LABEX).

The product monitoring and early pro-active warning system allows for convenient, stress free handling and fast response times which further increases safety. To guarantee this, every single one of our devices is precisely calibrated and tested in a trial run lasting several hours during final inspection. Another important benefit – in addition to the electronic control's high degree of reliability – is the reduction of power consumption of up to 60% compared to previous controllers.

Inverter technology

Reduced energy consumption and durability are at the centre of this innovative system.

It lowers your operating costs and protects the environment. Thanks to the outstanding temperature stability, your refrigerated goods remain safely cooled at all times - even when the door is opened and after defrosting. Benefit from low-noise operation and low maintenance requirements.




Your Advantages

- Lower energy consumption
- temperature stability
- faster cooling

GMP-compliant and fulfilment of DIN 13277

Our newly developed cooling machines enable defrosting outside the cooling chamber. This allows us to achieve constant cooling temperatures even during defrosting, meaning that the entire cooling chamber can be qualified and your refrigerated goods are always perfectly stored in accordance with DIN 13277.

Optimised temperature behaviour and high temperature stability

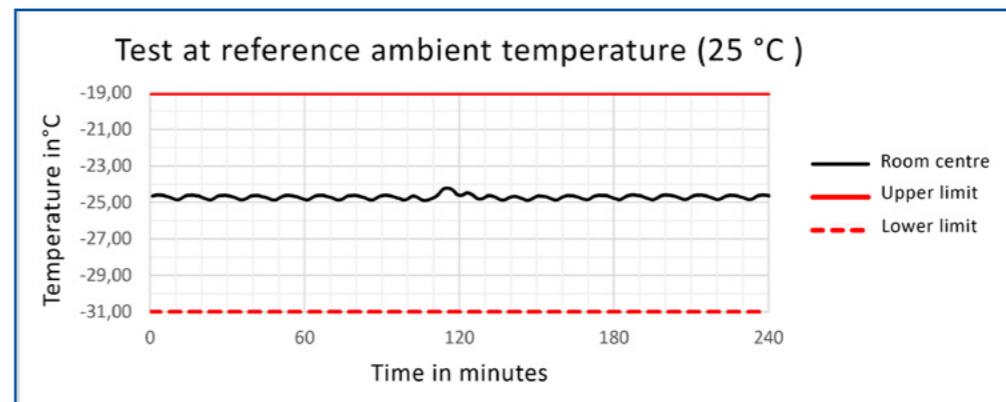

Your Advantages

- Perfect cooling temperature even during defrosting (see diagram)
- Powerful Cooling machine - e.g. pull-down from +25°C to -25°C in 65 minutes
- Durable inverter technology with 50 and 60 Hertz
- Easy to service - cooling machine is a plug-in unit

The highest standards and sustainable solutions

Quality assurance made easy: KIRSCH temperature documentation enables complete and precise recording and evaluation of the cooling temperature, which is also required as proof for official inspections. With the Kirsch EVOLUTION CLOUD, you don't even need an on-site network to guarantee functionality. Our systems enable the live transmission of data, alarm forwarding to the workplace and the direct sending of alerts by e-mail and SMS. Thanks to automatic data capture, our customized digital solutions are extremely resource-efficient. And more importantly: if in doubt, they serve as a reliable source of information to determine whether a certain chilled good can still be used. Our ISO-certified KIRSCH refrigerators and freezers are ideally designed especially for areas with the strictest cooling requirements. We use stable processes to ensure maximum safety and quality of our devices and services.

In addition to complying with the highest quality standards, we also consider sustainability to be a very important topic. All our products are designed for a long service life. This helps to preserve our planet's natural resources and means cost savings for our customers. At the same time, we have been able to permanently reduce power consumption as well as our noise emissions to far below the limit. With these measures, we are promoting the sustainable development of Philipp Kirsch GmbH, which is at the core of our company philosophy.



*

*

Relieve in the daily work routine


Complete temperature documentation is crucial in the process of quality assurance. The manual data collection is usually time-consuming and often inaccurate.

Our new KIRSCH EVOLUTION CLOUD takes care of this work for you, giving you more time to focus on more important tasks.


The optimal storage of your products and therefore the safety of the patients is our highest priority. With the KIRSCH EVOLUTION CLOUD, we guarantee a complete, reliable, and convenient solution for temperature documentation with automatic reporting.

In case of temperature deviations, the system will notify you via E-mail and/or SMS. Thanks to an integrated battery, this function remains active even in the event of a power failure. At the same time, this offers the possibility for mobile use, e.g. in transport boxes.

Reliable, independent,
smart. The KIRSCH
EVOLUTION CLOUD.

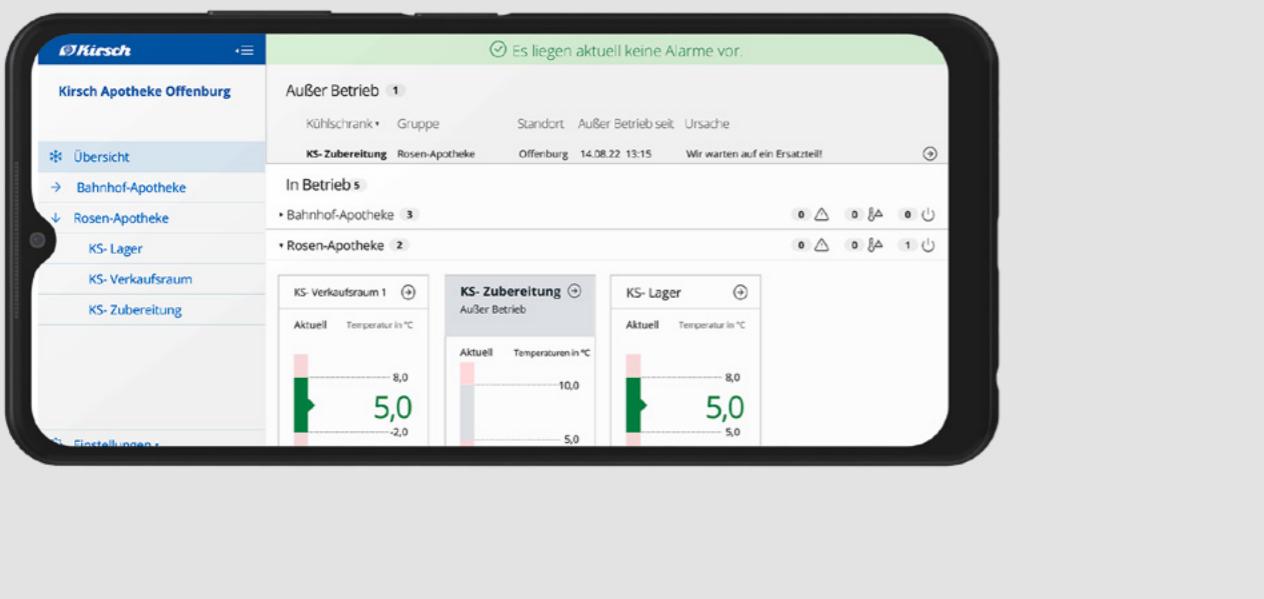

KIRSCH EVOLUTION MODUL

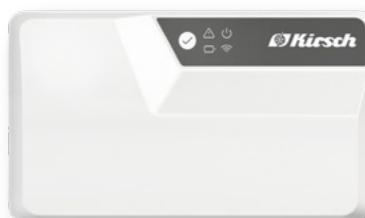

The KIRSCH EVOLUTION MODUL is the reliable connection between the areas to be monitored and the cloud.

An IoT SIM card, a data storage and a PT1000 sensor required for recording and data transmission, are already included in the scope of delivery.

Maximum storage safety through optimal connectivity

Your advantages at a glance

RELIABLE

- Alarm in case of deviation via E-mail and/or SMS
- Alarm chain with holiday function
- Temperature control, independent of location, possible at any time via smartphone, tablet or PC
- Additional integrated data storage for up to 30 days
- Complete temperature documentation

INDEPENDENT

- Network-independent, no LAN or WLAN connection required
- Data transmission via integrated IoT SIM card
- Easy retrofitting to existing or third-party devices
- Battery operation in case of power failure
- Mobile use


SMART

- Automatic reporting enables easy data backup and verification
- All relevant data at a glance at all time through access on smartphone, tablet or PC
- Simple and intuitive operation thanks to modern menu navigation
- User administration with assignment of rights
- Logbook for tracking all changes and alarms with download function
- Offline function for service, maintenance or cleaning

Technical Data

Power supply	230 V +/- 10%, 50/60 Hz	Dimension	212 x 137 x 47 mm (BxHxT)
Power consumption	12 W	Measuring range	-200°C bis +200°C
Ambient Temperature	0°C bis +45°C		Tolerance at 25°C +/- 0,5K and +/- 0,5% from measuring range
Protection type	IP54		PT1000
Protection class	II	Temperature sensor	measuring range -50°C bis +110°C (extended temperature range, possible via optional sensor)
Weight	ca. 530 g		

Kirsch cleanroom refrigerator

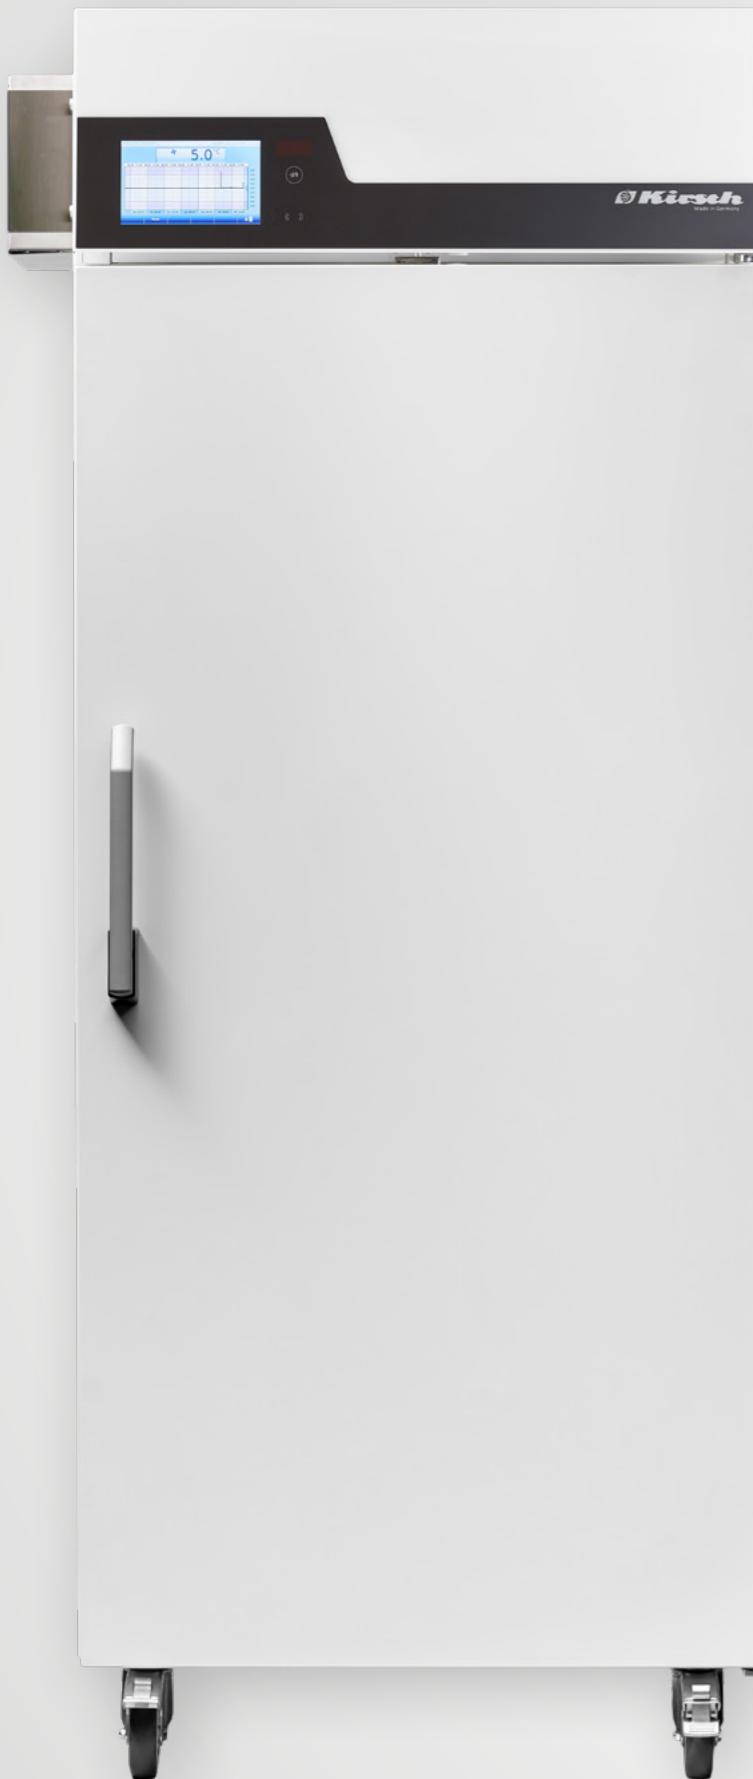

Kirsch cleanroom refrigerator

Welcome to the future of laboratory refrigeration with Kirsch cleanroom refrigerators - the perfect stand-alone solution for your highly sensitive samples and materials. Our refrigerators combine top performance with unrivalled cleanroom suitability. Thanks to the integrated HEPA filter system, our refrigerators provide excellent air purification, ensuring a contamination-free environment and preserving the integrity of your samples. Our cleanroom concept has been tested by independent specialists and confirmed with a certificate.

Experience the flexibility and reliability of our stand-alone solution, giving you the freedom to place the refrigerator where it is needed without compromising on performance. With Kirsch cleanroom refrigerators, you are well equipped to take your research to the next level.

Your Advantages

- Stand-alone solution: No on-site costs for enclosure of the appliance device or extraction system
- HEPA filter (removes 99.95% of particles)
- Stainless steel outer housing
- Condensation tray for manual emptying
- Disinfectant resistance tested
- GMP-compliant (with certificate)

We are pleased to present you
our three product lines

ULTIMATE

ULTIMATE

PROACTIVE

ESSENTIAL



- Elegant glass design
- Simple operation via a capacitive touch display (also with laboratory gloves)
- Access control with a log
- Graphical display of the temperature curve and min/max temperature
- Digital data documentation with KIRSCH Datanet software
- Intuitive help with alarm messages and troubleshooting in plain text
- Operation via remote control is possible
- Includes the benefits of the PRO-ACTIVE line

PROACTIVE



- Reduction of power consumption by up to 60 % compared to previous controllers
- Tamper-proof thanks to key switch
- Data storage for USB export
- Fast response time to imminent malfunctions thanks to pro-active alarming
- Reduction of temperature deviation
- Highest storage safety due to PT1000 monitoring
- Optimally matched components
- The benefits of the ESSENTIAL line include

ESSENTIAL



- Your entry into KIRSCH quality
- Maximum reliability
- Durable
- Temperature stability
- Flexibility
- Maximum safety

Discover our entire
product range



flexible

efficient

sustainable



Blood bank
refrigerators and
blood plasma freezers



Pharmaceutical
refrigerators and freezers



Laboratory refrigerators
and freezers



Temperature
documentation



Blood bank refrigerators compliant with DIN 58371

Blood plasma freezers compliant with DIN 58375

- Blood bank refrigerators and blood plasma freezers, certified according to Regulation (EU) 2017/745 (MDR). In order to offer patients and users of our devices the highest possible level of protection, we implemented that regulation before the end of the transition period in 2028.
- Medical device class IIa according to regulation (EU) 2017/745 (MDR)
- Blood reserves are stored at +4°C compliant with DIN 58371
- Blood plasma is stored at at least -31 °C compliant with DIN 58375

(Sold only through authorised dealers)



FROSTER BL 180 PRO-ACTIVE



FROSTER BL 330 PRO-ACTIVE



BL 520 ULTIMATE

BLOOD

Blood bank refrigerators

Reg. 2017/745 EU (MDR),
Class IIa



ULTIMATE PRO-ACTIVE	—	—	BL 300 ULTIMATE BL 300 PRO-ACTIVE	BL 520 ULTIMATE BL 520 PRO-ACTIVE	BL 720 ULTIMATE BL 720 PRO-ACTIVE
PC-KIT-NET					
Compliant with DIN 13277	✓	✓	✓	✓	✓
Capacity	95 l	170 l	280 l	500 l	700 l
Temperature setting	+4 °C	+4 °C	+4 °C	+4 °C	+4 °C
Voltage	220 - 240 V/50 and 60 Hz	220 - 240 V/50 and 60 Hz	220 - 240 V/50 and 60 Hz	220 - 240 V/50 and 60 Hz	220 - 240 V/50 and 60 Hz
Power consumption (in watts)	29	38	41.2	60	60
Normal consumption (in kWh/24 h)	0.45	0.41	0.61	0.895	0.81
Permitted ambient temperature	from +10 °C to +38 °C	from +10 °C to +38 °C	from +10 °C to +38 °C	from +10 °C to +38 °C	from +10 °C to +38 °C
Heat emission (max. in watts) at 38 °C	142	176	144	554	554
Weight	net 48 kg/gross 57 kg	net 77 kg/gross 87 kg	net 81 kg/gross 93 kg	net 138 kg/gross 161 kg	net 164 kg/gross 190 kg
Exterior dimensions (incl. distance from wall and door handle) (W x D x H in cm)	54 x 54 x 82	70 x 77 x 122	68 x 72 x 131.5	77 x 76 x 195.5	77 x 98 x 195.5
Usable dimension (W x D x H in cm)	39.5 x 34 x 34	51 x 34.5 x 46	49 x 39 x 92 (usable depth at the bottom 15 cm less)	56 x 39.5 x 92	56 x 60.5 x 129
Exterior dimensions with door open at 90° (W x D in cm)	60 x 106	76 x 136	73 x 133	83 x 144	83 x 166
Drawer inner dimensions (W x D x H in cm)	39.5 x 34 x 10	51 x 34.5 x 10	49 x 39 x 10 top drawers 51 x 31 x 10 bottom drawer	56 x 39.5 x 10	56 x 60.5 x 10
Capacity per drawer (500 ml blood bags)	30	38	43	49	81
Max. load: drawer	25 kg	50 kg	50 kg	50 kg	50 kg
Noise emission (for Ecool R600a)	37.4 dB (A)	39.5 dB (A)	37.7 dB (A)	47.7 dB (A)	47.7 dB (A)
Automatic defrost	✓	✓	✓	✓	✓
Defrost water container for manual draining	optional	optional	optional	optional	optional
Temperature deviation	+/-1.2 °C	+/-0.82 °C	+/-0.68 °C	+/-0.8 °C	+/-0.75 °C
Re-circulating air cooling	✓	✓	✓	✓	✓
Alerts in case of power failure	✓	✓	✓	✓	✓
Glass door with lock	optional	—	optional	optional	optional
Equipped with castors	optional	optional	optional	✓	✓
External housing – chrome-nickel steel 4301	—	—	—	optional	optional
Tabletop	optional	—	—	—	—
Door coupling fitting	optional	optional	optional	optional	optional
Refrigerating machine fan, built-in	✓	optional	optional	✓	✓
LED lighting strip mounted on the roof/on the side wall of the interior	optional/—	optional/—	optional/—	—/optional	—/optional
Adjustment gibs/variable interior arrangement	—	—	✓	✓	✓
Aluminium drawer with roller runners (standard/maximum)	2/2	2/3	4/5	5/7	5/7
Stainless steel drawer with roller runners	—	optional	optional	optional	optional
Drawer insert in a set	—	optional	optional	optional	optional
Vario Support	—	—	optional	optional	optional
Shelf with overlays or rails	—	—	optional	optional	optional
Wire basket with rails	—	—	—	optional	optional



MDR-certified Medical devices
Medical devices class IIa, certified according to Regulation (EU) 2017/745 (MDR) by mdc medical device certification GmbH (CE0483)*.

Future-proof & reliable

With the validity of the MDR certificate until March 2027, we guarantee the uninterrupted supply of the blood cooling devices.



Reliable blood storage

By certifying our blood cooling devices we contribute to better protection of the public health and patient safety.



Blood plasma freezers

Reg. 2017/745 EU (MDR),
Class IIa



ULTIMATE	FROSTER BL 330 ULTIMATE	FROSTER BL 530 ULTIMATE	FROSTER BL 730 ULTIMATE
PRO-ACTIVE	FROSTER BL 330 PRO-ACTIVE	FROSTER BL 530 PRO-ACTIVE	FROSTER BL 730 PRO-ACTIVE
PC-KIT-NET			
Compliant with DIN 13277	✓	✓	✓
Capacity	300 l	500 l	700 l
Temperature setting	approx. -32 °C	approx. -32 °C	approx. -32 °C
Voltage	220 - 240 V/50 and 60 Hz	220 - 240 V/50 and 60 Hz	220 - 240 V/50 and 60 Hz
Power consumption (in watts)	286	280	283
Normal consumption (in kWh/24 h)	4.55	5.47	5.7
Permitted ambient temperature	from +10 °C to +32 °C	from +10 °C to +32 °C	from +10 °C to +32 °C
Heat emission (max. in watts)	1090	1090	1090
Weight	net 120 kg/gross 135 kg	net 168 kg/gross 191 kg	net 188 kg/gross 214 kg
Overall dimensions (including distance from wall and door handle) (W x D x H in cm)	74 x 77 x 166/74 x 77 x 159	77 x 81 x 199.5	77 x 102 x 199.5
Usable dimensions (W x D x H in cm)	53 x 42 x 75	56 x 46.5 x 120	56 x 67.5 x 120
Exterior dimensions with door open at 90° (W x D in cm)	80 x 142	83 x 148	83 x 171
Drawer inner dimensions (W x D x H in cm)	54 x 37 x 10	56 x 39.5 x 10	56 x 60.5 x 10
Capacity per drawer (plasma cartons W x D x H: 13.5 x 2x5 x 16.5 in cm)	52	60	92
Max. load: drawer	50 kg	50 kg	50 kg
Noise emission	51.1 dB (A)	50.6 dB (A)	49.5 dB (A)
Automatic defrost	✓	✓	✓
Defrost water container for manual draining	optional	optional	optional
Temperature deviation	+/-0,45 °C	+/-0,9 °C	+/-0,9 °C
Re-circulating air cooling	✓	✓	✓
Alerts in case of power failure	✓	✓	✓
Equipped with castors	optional	✓	✓
External housing – chrome-nickel steel 4301	–	optional	optional
Refrigerating machine, water-cooled*	–	optional	optional
LED lighting strip mounted on the roof/on the side wall of the interior	optional/–	–/optional	–/optional
Adjustment gibs/variable interior arrangement	✓	✓	✓
Aluminium drawer with roller runners (standard/maximum)	4/4	5/7	5/7
Stainless steel drawer with roller runners (standard/maximum)	optional	optional	optional
Drawer insert in a set	optional	optional	optional
Vario Support	optional	optional	optional
Shelf with overlays or rails	optional	optional	optional
Wire basket with rails	optional	optional	optional



Display at eye-level

The display is positioned at eye-level to make it easier to read and use.



BLOOD

Easy access

The well thought-out opening mechanism makes it even simpler to equip our devices.



Self-closing door

Doors that are “open by accident” are a thing of the past.



Flexible arrangement

Height-adjustable on runners with locking mechanism.

MDR-Certificate

Our medical devices, the KIRSCH Blood Bank Refrigerators and Blood Plasma Freezers, meet all legal requirements and have been certified according to Regulation (EU) 2017/745 (MDR) since March 28, 2022. The certification was carried out by the notified body mdc medical device certification GmbH (CE0483).

The MDR (Medical Device Regulation) replaces the existing medical device directives (93/42/EEC).

By obtaining MDR certification for our blood cooling devices and therefore fulfilling all strict requirements, we are contributing to the better protection of public health and patient safety.

The certificate and an overview of the products covered by this certificate including supplementary information and conditions can be found on our website.

Pharmaceutical refrigerators* and freezers

*Compliant with DIN 13277 (replaces DIN 13221)

- Safe storage of pharmaceuticals and vaccines
- High-performance cooling machine for maximum temperature constancy even if the door has been opened for a longer period of time
- Data storage for USB export
- Aluminium interior container
- KIRSCH ergonomics concept
- High energy efficiency
- Environmentally friendly refrigerant R600a
- Tamper-proof thanks to key switch
- Easy access
- Height-adjustable drawers or shelves
- Automatic defrost



MED 100 PRO-ACTIVE



MED 340 PRO-ACTIVE



MED 520 ULTIMATE

Pharmaceutical refrigerators

Compliant with DIN 13277



ULTIMATE	–	–	–	–	–	–	MED 288 ULTIMATE	MED 340 ULTIMATE
PRO-ACTIVE	–	MED 100 PRO-ACTIVE	–	MED 126 PRO-ACTIVE	MED 200 PRO-ACTIVE	MED 288 PRO-ACTIVE	MED 340 PRO-ACTIVE	–
ESSENTIAL	ESSENTIAL MED 85 DIN	–	ESSENTIAL MED 125	–	–	–	–	–
PC-KIT-NET	standard on all ULTIMATE, optional on all PRO-ACTIVE, not available on the ESSENTIAL							
Compliant with DIN 13277	✓	✓	✓	✓	✓	✓	✓	✓
Capacity	80 l	95 l	120 l	120 l	170 l	280 l	330 l	
Temperature setting	approx. +2 to +15 °C	approx. 2 to +15 °C	approx. +2 to +15 °C	approx. +2 to +15 °C	approx. 2 to +15 °C	approx. 2 to +15 °C	approx. +2 to +15 °C	approx. +2 to +15 °C
Voltage	220 - 240 V/50 and 60 Hz	220 - 240 V/50 and 60 Hz	220 - 240 V/50 Hz	220 - 240 V/50 Hz	220 - 240 V/50 and 60 Hz	220 - 240 V/50 and 60 Hz	220 - 240 V/50 and 60 Hz	220 - 240 V/50 and 60 Hz
Refrigerating machine for 60 Hz operation	✓	✓	–	–	✓	✓	✓	✓
Power consumption (in watts)	102	30	115	105	30	38.7	39.9	
Normal consumption (in kWh/24 h)	0.71	0.426	1.28	0.58	0.53	0.59	0.51	
Permitted ambient temperature	from +10 °C to +38 °C	from +10 °C to +38 °C	from +10 °C to +38 °C	from +10 °C to +38 °C	from +10 °C to +38 °C	from +10 °C to +38 °C	from +10 °C to +38 °C	from +10 °C to +38 °C
Heat emission (max. in watts)	148	142	190	183	142	144	202	
Weight	net 34 kg/gross 40 kg	net 47 kg/gross 56 kg	net 43 kg/gross 50 kg	net 49 kg/gross 58 kg	net 69 kg/gross 80 kg	net 75 kg/gross 87 kg	net 100 kg/gross 114 kg	
Exterior dimensions (incl. distance from wall and door handle) (W x D x H in cm)	48 x 51 x 74	54 x 54 x 82	54 x 53.5 x 81	54 x 53.5 x 88.8	54 x 55.7 x 122	67 x 72 x 132	67 x 66 x 189	
Usable dimensions (W x D x H in cm) (usable depth at the bottom 15 cm less)	34 x 32 x 63	40.8 x 32 x 34	40.8 x 32 x 59 (usable depth at the bottom 15 cm less)	40.8 x 32 x 59 (usable depth at the bottom 15 cm less)	38 x 34 x 72	50.4 x 32 x 92 (usable depth at the bottom 15 cm less)	50.4 x 32 x 116	
Exterior dimensions with door open at 90° (W x D in cm)	47 x 96	54 x 105.5	54 x 105.5	54 x 105.5	54 x 105	67 x 130	67 x 124	
Drawer inner dimensions (W x D x H in cm)	34 x 32 x 5.6	40.8 x 32 x 5.6	40.8 x 32 x 5.6	40.8 x 32 x 5.6	38 x 34 x 5.6	50.4 x 32 x 5.6	50.4 x 32 x 5.6/-	
Maximum load: drawer/shelf	9.5 kg/25 kg	13 kg/25 kg	13 kg/25 kg	13 kg/25 kg	13 kg/25 kg	16 kg/40 kg	16 kg/40 kg	
Noise emission (for Ecool R600a)	38.5 dB (A)	44 dB (A)	42 dB (A)	40 dB (A)	49 dB (A)	40.8 dB (A)	39 dB (A)	
Automatic defrost	✓	✓	✓	✓	✓	✓	✓	
Defrost water container for manual draining	optional	optional	optional	optional	optional	optional	optional	optional
Temperature deviation	+/-1,15 °C	+/-0,9 °C	+/-0,75 °C	+/-0,75 °C	+/-0,69 °C	+/-0,8 °C	+/-0,87 °C	
Re-circulating air cooling	✓	✓	✓	✓	✓	✓	✓	
Alerts in case of power failure	✓	✓	✓	✓	✓	✓	✓	
Glass door with lock	–	optional	✓	–	–	optional	optional	optional
Glass door	–	–	optional (no longer DIN 13277-compliant)	optional (no longer DIN 13277-compliant)	–	–	–	–
Equipped with castors	optional	optional	optional	optional	optional	optional	optional	optional
Tabletop	–	optional	optional	–	optional	–	–	–
Decorative frame	optional	optional	optional	optional	optional	optional	optional	optional
Digital temperature display prepared for external installation into furniture front	optional	✓	optional	✓	✓	✓	–	–
Door coupling fitting	optional	optional	optional	optional	optional	optional	optional	optional
Refrigerating machine fan, built-in	optional	✓	optional	optional	✓	optional	optional	optional
Cleanroom design with special air routing	–	✓	–	–	–	–	–	–
LED lighting strip mounted on the roof of the interior	–	optional	optional	optional	optional	optional	optional	optional
Plastic drawer incl. drawer insert (standard/maximum)	3/3	3/3	3/3	3/3	–	–	–	–
Plastic drawer with roller runners + drawer insert (standard/maximum)	–	–	–	–	4/5	5/8	9/12	
Vario Support	–	–	–	–	–	optional	optional	optional
Top drawer is lockable	optional	–	optional	optional	–	optional	optional	optional
Shelf	1	1	1	1	–	–	–	–
Shelf with overlays/rails	–/–	–/–	–/–	–/–	1/–	optional/optional	optional/optional	optional/optional



Pharmaceutical refrigerators* and freezers

*Compliant with DIN 13277




ULTIMATE	MED 468 ULTIMATE	MED 520 ULTIMATE	MED 720 ULTIMATE	-	-
PRO-ACTIVE	MED 468 PRO-ACTIVE	MED 520 PRO-ACTIVE	MED 720 PRO-ACTIVE	-	FROSTER MED 95 PRO-ACTIVE
ESSENTIAL	-	-	-	ESSENTIAL FROSTER 70	-
PC-KIT-NET Standard on all ULTIMATE, optional on all PRO-ACTIVE, not available on the ESSENTIAL					
Compliant with DIN 13277	✓	✓	✓	-	-
Capacity	460 l	500 l	700 l	70 l	95 l
Temperature setting	approx. 2 to +15 °C	approx. +2 to +15 °C	approx. 2 to +15 °C	approx. -15 to -22 °C	approx. -5 to -25 °C
Voltage	220 - 240 V/50 and 60 Hz	220 - 240 V/50 and 60 Hz	220 - 240 V/50 and 60 Hz	220 - 240 V/50 Hz	220 - 240 V/50 Hz
Refrigerating machine for 60 Hz operation	✓	✓	✓	-	-
Power consumption (in watts)	90	66	66	124	123
Normal consumption (in kWh/24 h)	0.77	0.82	0.85	1.41	1.33
Permitted ambient temperature	from +10 °C to +38 °C	from +10 °C to +38 °C	from +10 °C to +38 °C	from +10 °C to +32 °C	from +10 °C to +32 °C
Heat emission (max. in watts)	356	554	554	129	162
Weight	net 132 kg/gross 146 kg	net 145 kg/gross 168 kg	net 164 kg, gross 190 kg	net 35 kg/gross 42 kg	net 50 kg/gross 59 kg
Overall dimensions (including distance from wall and door handle) (W x D x H in cm)	74 x 77.5 x 189	77 x 76 x 195.5	77 x 98 x 195.5	47 x 51 x 74	54 x 54 x 82
Usable dimensions (W x D x H in cm)	57.3 x 43 x 116	57.3 x 39 x 129	56.3 x 59.5 x 129	35 x 31 x 60 (usable depth at the bottom 15 cm less)	43 x 36 x 34
Exterior dimensions with door open at 90° (W x D in cm)	74 x 142	77 x 144	77 x 165	47 x 96	54 x 105.5
Drawer/shelf inner dimensions (W x D x H in cm)	57.3 x 43 x 5.6/-	57.3 x 39 x 5.6/-	56.3 x 59.5 x 5.6/-	-/35 x 31 cm above, 35 x 20 cm below	40.8 x 32 x 5.6 /43 x 36 cm
Maximum load: drawer/shelf	24 kg/40 kg	24 kg/40 kg	24 kg/40 kg	-/25 kg	13 kg/25 kg
Noise emission (for Ecool R600a)	40 dB (A)	42 dB (A)	42 dB (A)	39.9 dB (A)	38 dB (A)
Automatic defrost	✓	✓	✓	-	-
Defrost water container for manual draining	optional	-	-	-	✓
Temperature deviation	+/-0.75 °C	+/-0.8 °C	+/-0.9 °C	+/-1.65 °C	+/-0.8 °C
Re-circulating air cooling	✓	✓	✓	-	-
Alerts in case of power failure	✓	✓	✓	-	✓
Glass door with lock	optional	optional	optional	-	-
Equipped with castors	optional	✓	✓	optional	optional
External housing - chrome-nickel steel 4301	-	optional	optional	-	-
Tabletop	-	-	-	-	optional
Decorative frame	optional	optional	optional	optional	optional
Digital temperature display prepared for external installation into furniture front	-	-	-	-	✓
Door coupling fitting	optional	optional	optional	optional	optional
Refrigerating machine fan, built-in	✓	✓	✓	optional	✓
Cleanroom design with special air routing	✓	-	-	-	✓
Cleanroom version with HEPA filter, stainless steel outer housing	-	✓	✓	-	-
LED lighting strip mounted on the side wall of the interior	optional	optional	optional	-	-
Plastic drawer incl. drawer insert (standard/maximum)	-	-	-	-	1/3
Plastic drawer with roller runners + drawer insert (standard/maximum)	10/12	12/12	12/12	-	-
Top drawer is lockable	optional	optional	-	-	-
Vario Support	optional	optional	optional	-	-
Shelf	-	-	-	4	2
Shelf with overlays or rails	optional	optional	optional	-	-
Wire basket with rails	optional	optional	optional	-	-



Cleanroom

HEPA-Filter solutions for use in cleanroom environments.



*Example values from the Med 100

Inverter Technology

Thanks to this new technology, our refrigerators now consume up to 50% less energy.



Laboratory refrigerators* and freezers

*Compliant with DIN 13277 (replaces DIN 13221)

also with explosion-proof interior

- Safe storage of pharmaceuticals and vaccines
- High-performance cooling machine for maximum temperature constancy even if the door has been opened for a longer period of time
- Data storage for USB export
- KIRSCH Ergonomics Concept
- Tamper-proof thanks to key switch
- Aluminium interior container
- High energy efficiency
- Environmentally friendly, high-pressure foam insulation
- Environmentally friendly refrigerant R600a
- Easy access
- Height-adjustable drawers or shelves
- Automatic defrost

(depending on the model)



LABO 100 PRO-ACTIVE



LABO 340 PRO-ACTIVE
(with optional accessories)



LABO 720 CHROMAT ULTIMATE
(with optional accessories)

Laboratory refrigerators



*Compliant with DIN 13277



ULTIMATE	–	–	–	–	LABO 288 ULTIMATE	LABO 340 ULTIMATE	LABO 468 ULTIMATE	LABO 520 ULTIMATE
PRO-ACTIVE	LABO 100 PRO-ACTIVE	–	–	LABO 126 PRO-ACTIVE	LABO 288 PRO-ACTIVE	LABO 340 PRO-ACTIVE	LABO 468 PRO-ACTIVE	LABO 520 PRO-ACTIVE
ESSENTIAL	–	ESSENTIAL 125	–	–	–	–	–	–
PC-KIT-NET	Standard on all ULTIMATE, optional on all PRO-ACTIVE, not available on the ESSENTIAL							Standard on all ULTIMATE, optional on all PRO-ACTIVE, not available on the ESSENTIAL
Compliant with DIN 13277	✓	–	✓	✓	✓	✓	✓	✓
Capacity	95 l	120 l	120 l	280 l	330 l	460 l	500 l	500 l
Temperature setting	approx. 2 to +15 °C	approx. +2 to +15 °C	approx. +2 to +15 °C	approx. 0 to +15 °C	approx. 0 to +15 °C	approx. 0 to +15 °C	approx. 0 to +15 °C	approx. 0 to +15 °C
Voltage	220 - 240 V/50 and 60 Hz	220 - 240 V/50 Hz	220 - 240 V/50 Hz	220 - 240 V/50 and 60 Hz	220 - 240 V/50 and 60 Hz	220 - 240 V/50 and 60 Hz	220 - 240 V/50 and 60 Hz	220 - 240 V/50 and 60 Hz
Refrigerating machine for 60 Hz operation	✓	–	–	✓	✓	✓	✓	✓
Power consumption (in watts)	30	125	100	34	38.5	75	60	60
Normal consumption (in kWh/24 h)	0,328	0.55	0.61	0.58	0.46	0.80	0.77	0.77
Permitted ambient temperature	from +10 °C to +38 °C	from +10 °C to +38 °C	from +10 °C to +38 °C	from +10 °C to +38 °C	from +10 °C to +38 °C	from +10 °C to +38 °C	from +10 °C to +38 °C	from +10 °C to +38 °C
Heat emission (max. in watts)	142	123	181	144	202	356	554	554
Weight	net 44 kg/gross 53 kg	net 39 kg/gross 48 kg	net 49 kg/gross 58 kg	net 71 kg/gross 83 kg	net 90 kg/gross 104 kg	net 113 kg/gross 127 kg	net 125 kg/gross 148 kg	net 125 kg/gross 148 kg
Overall dimensions (including distance from wall and door handle) (W x D x H in cm)	54 x 54 x 82	54 x 53.5 x 81	54 x 53.5 x 88.8	67 x 72 x 132	67 x 66 x 189	74 x 77.5 x 189	77 x 76 x 195,5	77 x 76 x 195,5
Usable dimensions (W x D x H in cm)	43 x 33 x 34	43 x 33 x 59 (usable depth at the bottom 15 cm less)	43 x 33 x 59 (usable depth at the bottom 15 cm less)	52.7 x 39 x 92 (usable depth at the bottom 15 cm less)	52.7 x 39 x 116	59 x 50 x 116	59 x 45 x 129	59 x 45 x 129
Exterior dimensions with door open at 90° (W x D in cm)	54 x 106	54 x 106	54 x 106	67 x 130	67 x 124	74 x 142	74 x 144	74 x 144
Drawer/shelf inner dimensions (W x D x H in cm)	40.8 x 32 x 5.6/ 43 x 33	-/43 x 33	-/43 x 33	-/52.7 x 39	50.4 x 32 x 5.6/ 52.7 x 39	-/59 x 50	-/59 x 45	-/59 x 45
Maximum load: drawer/shelf	13 kg/25 kg	13 kg/25 kg	13 kg/25 kg	16 kg/40 kg	16 kg/40 kg	24 kg/40 kg	-/40 kg	-/40 kg
Noise emission (for Ecool R600a)	44 dB (A)	41.4 dB (A)	38 dB (A)	41 dB (A)	38.6 dB (A)	40 dB (A)	47 dB (A)	47 dB (A)
Automatic defrost	✓	✓	✓	✓	✓	✓	✓	✓
Defrost water container for manual draining	optional	optional	optional	optional	optional	optional	optional	optional
Temperature deviation	+/-0,88 °C	+/-1,12 °C	+/-0,65 °C	+/-0,5 °C	+/-0,27 °C	+/-0,5 °C	+/-0,5 °C	+/-0,5 °C
Re-circulating air cooling	✓	–	✓	✓	✓	✓	✓	✓
Alerts in case of power failure	–	optional	–	✓	✓	✓	✓	✓
Glass door with lock/glass door	optional/–	-/optional	-/optional	optional/–	optional/–	optional/–	optional/–	optional/–
Equipped with castors	optional	optional	optional	optional	optional	optional	optional	optional
External housing - chrome-nickel steel 4301	–	–	–	–	–	–	–	optional
Tabletop	optional	optional	–	–	–	–	–	–
Digital temperature display prepared for external installation into furniture front	✓	optional	optional	–	–	–	–	–
Door coupling fitting/decorative frame	optional	optional	optional	optional	optional	optional	optional	optional
Refrigerating machine fan, built-in	✓	optional	optional	optional	optional	✓	✓	✓
Cleanroom design with special air routing	✓	–	–	–	–	✓	–	–
Cleanroom version with HEPA filter, stainless steel outer housing	–	–	–	–	–	–	–	✓
LED lighting strip mounted on the roof/on the side wall of the interior	optional/–	optional/–	optional/–	optional/–	–/optional	–/optional	–/optional	–/optional
Flexible equipment is possible	✓	✓	✓	✓	✓	✓	✓	✓
Plastic drawer	optional	optional	optional	optional	–	–	–	optional
Plastic drawer with roller runners	–	–	–	optional	1 standard/optionally up to 12	optional	optional	optional
Aluminium drawer with roller runners	–	–	–	optional	optional	–	–	optional
Stainless steel drawer with roller runners	–	–	–	optional	–	–	–	optional
Vario Support	–	–	–	optional	optional	optional	optional	optional
Shelf	2	2	2	–	–	–	–	optional
Shelf with overlays/rails	–/–	–/–	–/–	–/–	3/optional	4/optional	4/optional	5/optional
Wire basket with rails	–	–	–	–	–	–	optional	optional



Laboratory refrigerators and freezers

*Compliant with DIN 13277



ULTIMATE	LABO 720 ULTIMATE	LABO 720 CHROMAT ULTIMATE	FROSTER LABO 330 ULTIMATE	FROSTER LABO 530 ULTIMATE	FROSTER LABO 730 ULTIMATE
PRO-ACTIVE	LABO 720 PRO-ACTIVE	LABO 720 CHROMAT PRO-ACTIVE	FROSTER LABO 330 PRO-ACTIVE	FROSTER LABO 530 PRO-ACTIVE	FROSTER LABO 730 PRO-ACTIVE
PC-KIT-NET	Standard on the ULTIMATE,				optional on the PRO-ACTIVE
Compliant with DIN 13277	✓	✓	–	–	–
Capacity	700 l	700 l	300 l	500 l	700 l
Temperature setting	approx. 0 to +15 °C	approx. +4 to +15 °C	approx. -10 to -30 °C	approx. -10 to -25 °C	approx. -10 to -25 °C
Voltage	220 - 240 V/50 and 60 Hz	220 - 240 V/50 and 60 Hz	220 - 240 V/50	220 - 240 V/50 and 60 Hz	220 - 240 V/50 and 60 Hz
Refrigerating machine for 60 Hz operation	✓	✓	optional	✓	✓
Power consumption (in watts)	60	60	590	227	230
Normal consumption (in kWh/24 h)	0.82	0.82	3,69	4,42	4,58
Permitted ambient temperature	from +10 °C to +38 °C	from +10 °C to +38 °C	from +10 °C to +32 °C	from +10 °C to +32 °C	from +10 °C to +32 °C
Heat emission (max. in watts)	554	554	693	426	428
Weight	net 141 kg/gross 167 kg	net 146 kg/gross 174 kg	net 125 kg/gross 142 kg	net 140 kg/gross 163 kg	net 157 kg/gross 183 kg
Exterior dimensions (incl. distance from wall and door handle) (W x D x H in cm)	77 x 98 x 195.5	77 x 98 x 195.5	74 x 77 x 166/74 x 77 x 159	77 x 76 x 195.5	77 x 97 x 195.5
Usable dimensions (W x D x H in cm)	59 x 65 x 129	59 x 65 x 129	57 x 42 x 80	59 x 45 x 129	59 x 65 x 129
Exterior dimensions with door open at 90° (W x D in cm)	77 x 165	77 x 165	74 x 141	77 x 144	77 x 165
Shelf inner dimensions (W x T in cm)	59 x 65	59 x 65	57 x 42	59 x 45	59 x 65
Maximum load: shelf	40 kg	40 kg	40 kg	40 kg	40 kg
Noise emission (for Ecolab R600a in refrigerators)	42 dB (A)	42 dB (A)	51 dB (A)	49 dB (A)	49 dB (A)
Automatic defrost	✓	✓	✓	✓	✓
Defrost water container for manual draining	optional	optional	optional	optional	optional
Temperature deviation	+/-0,6 °C	+/-0,6 °C	+/-1,0 °C **	+/-1,2 °C **	+/-1,2 °C **
Re-circulating air cooling	✓	✓	✓	✓	✓
Alerts in case of power failure	✓	✓	✓	✓	✓
Glass door with lock	optional	✓	–	–	–
Equipped with castors	✓	✓	optional	✓	✓
External housing – chrome-nickel steel 4301	optional	optional	–	optional	optional
Refrigerating machine fan, built-in	✓	✓	✓	✓	✓
Cleanroom version with HEPA filter, stainless steel outer housing	–	✓	–	–	–
LED lighting strip mounted on the roof/on the side wall of the interior	-/optional	-/✓	optional/-	-/optional	-/optional
Flexible equipment is possible	✓	✓	✓	✓	✓
Plastic drawer with roller runners	optional	optional	–	optional	optional
Aluminium drawer with roller runners	optional	optional	optional	optional	optional
Stainless steel drawer with roller runners	optional	optional	optional	optional	optional
Vario Support	optional	optional	optional	optional	optional
Shelf with overlays/rails	5/optional	5/optional	4/optional	5/optional	5/optional
Wire basket with rails	optional	optional	optional	optional	optional

**Without defrosting

Display at eye-level

The display is positioned at eye-level to make it easier to read and use.



Easy access

The well thought-out opening mechanism makes it even simpler to equip our devices.



Self-closing door

Doors that are “open by accident” are a thing of the past.



Flexible arrangement

Gibs (every 15 mm) for flexible interior arrangement.





Explosion protection

Our promise - your safety!



KIRSCH was the first company in the laboratory cooling sector to adapt to the new ATEX product directive 2014/34/EU.

The interior of the devices is tested for absence of ignition sources by TÜV SÜD in conformity with Directive ATEX 2014/34/EU:

- All of the electrical equipment and components used in the interior (fans, temperature sensors, etc.) are specifically designed for use in zone 1* and zone 2
- We also guarantee the maximum temperature stability in explosion-proof interiors
- Intrinsically safe supply to the temperature sensors in the interior
- Explosion-proof fan
- Special earthing concept for discharging electrical potential
- Plastic parts in the interior have an antistatic design

(depending on the model)

*LABEX 465



LABEX®-Devices

Our LABEX® models are the safest explosion-proof devices on the market that offer maximum temperature stability.



① Liability according to ATEX operator- and product guidelines

According to the ATEX operating directive, the plant operator is responsible for the correct selection of the equipment. For the determination of the suitable EX zone (e.g. Zone 1, Zone 2), following explosion hazards, among other things, have to be taken into consideration: the explosiveness of the stored substances and the frequency of occurrence of an explosive atmosphere.

We will gladly assist you in selecting the correct explosion protected device and provide you with the technical report of the TÜV-SÜD. You will find the declaration of confirmity on our website: kirsch-medical.com/certificates/explosion-proofness.

① ZONE 1

For usage in more demanding environment and storage of highly flammable/explosive substances, we offer even safer unique Zone 1 devcies. Though without of internal fan, the units offer remarkably good temperature homogeneity.

Laboratory refrigerators with an explosion-proof interior



ULTIMATE PRO-ACTIVE	- LABEX 105 PRO-ACTIVE	LABEX 288 ULTIMATE LABEX 288 PRO-ACTIVE	LABEX 340 ULTIMATE LABEX 340 PRO-ACTIVE	- LABEX 465 PRO-ACTIVE	LABEX 468 ULTIMATE LABEX 468 PRO-ACTIVE	LABEX 520 ULTIMATE LABEX 520 PRO-ACTIVE	LABEX 720 ULTIMATE LABEX 720 PRO-ACTIVE
EX protection zone	2	2	2	1	2	2	2
PC-KIT-NET		Standard on all ULTIMATE, optional on all PRO-ACTIVE			Standard on all ULTIMATE, optional on all PRO-ACTIVE		
Compliant with DIN 13277	-	✓	✓	✓	✓	✓	✓
Capacity	95 l	280 l	330 l	460 l	460 l	500 l	700 l
Temperature setting	approx. +2 to +15 °C	approx. 0 to +15 °C	approx. 0 to +15 °C	approx. 0 to +15 °C	approx. 0 to +15 °C	approx. 0 to +15 °C	approx. 0 to +15 °C
Voltage	220 - 240 V/50 and 60 Hz	220 - 240 V/50 and 60 Hz	220 - 240 V/50 and 60 Hz	220 - 240 V/50 and 60 Hz	220 - 240 V/50 and 60 Hz	220 - 240 V/50 Hz	220 - 240 V/50 Hz
Refrigerating machine for 60 Hz operation	✓	✓	✓	✓	✓	-	-
Power consumption (in watts)	30	40	50.3	150	80	234	237
Normal consumption (in kWh/24 h)	0.34	0.67	0.73	0.76	0.81	1.2	1.23
Permitted ambient temperature	from +10 °C to +38 °C	from +10 °C to +38 °C	from +10 °C to +38 °C	from +10 °C to +38 °C	from +10 °C to +38 °C	from +10 °C to +38 °C	from +10 °C to +38 °C
Heat emission (max. in watts)	142	144	202	280	356	543	545
Weight	net 46 kg, gross 55 kg	net 75 kg/gross 87 kg	net 95 kg/gross 109 kg	net 120 kg/gross 134 kg	net 120 kg/gross 134 kg	net 126 kg/gross 149 kg	net 143 kg/gross 169 kg
Exterior dimensions (incl. distance from wall and door handle) (W x D x H in cm)	54 x 54 x 82	67 x 72 x 132	67 x 66 x 189	74 x 76 x 176	74 x 77.5 x 189	77 x 76 x 195.5	77 x 98 x 195.5
Usable dimensions (W x D x H in cm)	43 x 36 x 43	52.7 x 39 x 92 (usable depth at the bottom 15 cm less)	52.7 x 39 x 116	-/57 x 43 x 122	59 x 50 x 116	59 x 45 x 129	59 x 65 x 129
Exterior dimensions with door open at 90° (W x D in cm)	54 x 106	67 x 130	67 x 124	74 x 140	74 x 142	77 x 144	77 x 165
Drawer/shelf inner dimensions (W x D x H in cm)	40.8 x 32 x 5.6/ 43 x 36	50.4 x 32 x 5.6/ 52.7 x 39	50.4 x 32 x 5.6/ 52.7 x 39	57 x 43 x 5.6	57.3 x 43 x 5.6/ 59 x 50	59 x 45	59 x 65
Maximum load: drawer/shelf	13 kg/25 kg	16 kg/40 kg	16 kg/40 kg	24 kg/40 kg	24 kg/40 kg	24 kg/40 kg	-/40 kg
Noise emission (for Ecool R600a)	44 dB (A)	44.9 dB (A)	43.7 dB (A)	40 dB (A)	40 dB (A)	41 dB (A)	42 dB (A)
Automatic defrost	✓	✓	✓	✓	✓	✓	✓
Defrost water container for manual draining	✓	✓	✓	✓	✓	✓	✓
Temperature deviation	+/-2,85 °C	+/-0,37 °C	+/-0,66 °C	+/-1,69 °C	+/-0,9 °C	+/-0,45 °C	+/-0,5 °C
Re-circulating air cooling	-	✓	✓	✓	✓	✓	✓
Alerts in case of power failure	✓	✓	✓	✓	✓	✓	✓
Glass door with lock	optional	optional	optional	optional	optional	optional	optional
Equipped with castors	optional	optional	optional	optional	optional	✓	✓
External housing – chrome-nickel steel 4301	-	-	-	-	-	optional	optional
Tabletop	optional	-	-	-	-	-	-
Decorative frame	optional	optional	optional	optional	optional	optional	optional
Refrigerating machine fan, built-in	✓	optional	optional	✓	✓	✓	✓
Flexible equipment is possible	✓	✓	✓	✓	✓	✓	✓
Plastic drawer (standard/maximum)	1/3	-	-	-	-	-	-
Plastic drawer with roller runners, conductive (standard/maximum)	-	1/8	2/10	optional	optional	optional	-
Shelf with overlays/rails	2/-	3/optional	4/optional	4/optional	6/optional	5/optional	5/optional

Laboratory freezers with an explosion-proof interior



ULTIMATE PRO-ACTIVE	–	–	FROSTER LABEX 330 ULTIMATE FROSTER LABEX 330 PRO-ACTIVE	FROSTER LABEX 530 ULTIMATE FROSTER LABEX 530 PRO-ACTIVE	FROSTER LABEX 730 ULTIMATE FROSTER LABEX 730 PRO-ACTIVE
ESSENTIAL	ESSENTIAL FROSTER LABEX 71	–	–	–	–
EX protection zone	2	2	2	2	2
PC-KIT-NET		Standard on the ULTIMATE, optional on the PRO-ACTIVE, not available on the ESSENTIAL			
Capacity	70 l	95 l	300 l	500 l	700 l
Temperature setting	approx. -15 °C to -22 °C	approx. -5 °C to -25 °C	approx. -10 to -30 °C	approx. -10 to -25 °C	approx. -10 to -25 °C
Voltage	220 - 240 V/50 Hz	220 - 240 V/50 Hz	220 - 240 V/50 Hz	220 - 240 V/50 Hz	220 - 240 V/50 Hz
Refrigerating machine for 60 Hz operation	–	–	optional	optional	optional
Power consumption (in watts)	100	119	540	550	534
Normal consumption (in kWh/24 h)	1.6	1.36	4.33	5.8	6.68
Permitted ambient temperature	from +10 °C to +32 °C	from +10 °C to +32 °C	from +10 °C to +32 °C	from +10 °C to +32 °C	from +10 °C to +32 °C
Heat emission (max. in watts)	129	159	660	717	706
Weight	net 35 kg, gross 42 kg	net 50 kg, gross 59 kg	net 125 kg/gross 142 kg	net 141 kg/gross 164 kg	net 157 kg/gross 183 kg
Exterior dimensions (incl. distance from wall and door handle) (W x D x H in cm)	47 x 51 x 74	54 x 54 x 82	74 x 78 x 166/74 x 7 x 159	77 x 76 x 195.5	77 x 97 x 195.5
Usable dimensions (W x D x H in cm)	35 x 31 x 60 (usable depth at the bottom 15 cm less)	43 x 36 x 43	57 x 42 x 80	59 x 45 x 129	59 x 65 x 129
Exterior dimensions with door open at 90° (W x D in cm)	47 x 96	54 x 106	74 x 142	77 x 144	77 x 166
Shelf (W x D in cm)	35 x 20 (below), 35 x 31 (above)	43 x 36	57 x 42	59 x 45	59 x 65
Maximum load: drawer/shelf	-/25 kg	13 kg/25 kg	-/40 kg	24 kg/40 kg	-/40 kg
Noise emission	39.9 dB (A)	38 dB (A)	51 dB (A)	52 dB (A)	52 dB (A)
Automatic defrost	–	–	✓	✓	✓
Defrost water container for manual draining	–	✓	✓	✓	✓
Temperature deviation	+/-1,65 °C **	+/-1,5 °C **	+/-0,85 °C **	+/-1 °C **	+/-1 °C **
Re-circulating air cooling	–	–	✓	✓	✓
Alerts in case of power failure	–	✓	✓	✓	✓
Equipped with castors	optional	optional	optional	✓	✓
External housing – chrome-nickel steel 4301	–	–	–	optional	optional
Tabletop	–	optional	–	–	–
Decorative frame	optional	optional	optional	optional	optional
Digital temperature display prepared for external installation into furniture front	–	✓	–	–	–
Refrigerating machine fan, built-in	optional	✓	✓	✓	✓
Flexible equipment is possible	–	✓	✓	✓	✓
Plastic drawer	–	optional	–	–	–
Plastic drawer with roller runners, conductive	–	–	–	optional	–
Shelf	4	2	–	–	–
Shelf with overlays/rails	–/–	–/–	4/optional	5/optional	5/optional

**Without defrosting



ATEX operating directive

In accordance with the ATEX operating directive, you as the system operator are responsible for the correct selection of your devices.



Intrinsic safety

Use of conductive, height-adjustable drawers with a variable interior arrangement.



Protected interior

A current discharge system prevents any static charges.



Explosion protection

The interior is free of ignition sources.



Temperature documentation with KIRSCH DATANET


Maximum quality assurance for your chilled goods – complete and simply reliable

With KIRSCH-DATANET software the data from your devices (temperature curve, door openings, alarm history etc.) can be effortlessly recorded in your IT network. The network solution (PC-KIT-NET) is a standard feature of KIRSCH ULTIMATE product line and optional for the PRO-ACTIVE. Also older devices can be upgraded with this retrofittable solution.


Kirsch DATALOG can be used for retrofitting the automatic temperature documentation and monitoring system on third party devices and devcies without an RS485 interface. It has limited range of function in compare with PC-KIT-NET

Your benefits

- Gapless temperature documentation
- Continuous monitoring
- Automatic alarm forwarding by e-mail
- Precise data evaluation and error analysis possibility, thanks to safely recorded refrigerator operating states
- Possibility to integration third-party devices
- No license fees for the software
- Minimal efforts required for documentation
- Refrigerator settings can be conveniently adjusted from the PC*
- User administration with configurable authorization levels
- Creation of user groups with user assignment possible

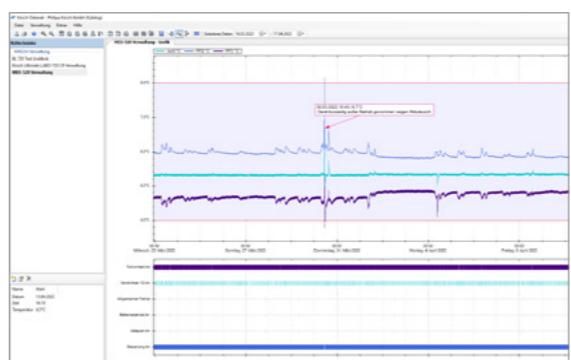

Graphical representation of the temperature curve with comment function and channel selection (e.g. compressor, door contact, defrost, general error and many more).

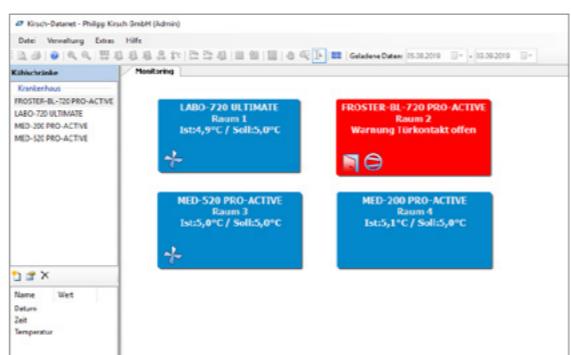

Monitoring overview of all integrated refrigerators and freezers. Malfunctions can be seen at a glance.

Name	Wert	Datum	Zeit	Temperatur
FROSTER BL-720 PRO-ACTIVE				
LABO-Z20 ULTIMATE				
MED-200 PRO-ACTIVE				
MED-520 PRO-ACTIVE				
LABO-Z20 ULTIMATE Raum 1	Ist 4,9°C / Soll 5,0°C			
FROSTER BL-720 PRO-ACTIVE Raum 2	Warnung Türkontakt offen			
MED-520 PRO-ACTIVE Raum 3	Ist 5,0°C / Soll 5,0°C			
MED-200 PRO-ACTIVE Raum 4	Ist 5,1°C / Soll 5,0°C			

Tabular overview of all measurement points with exact temperature values. This view can also be conveniently exported as a CSV file.

Service

Set-up service

We will be happy to help you with any questions you may have about setting up your temperature documentation system. We will also be happy to advise you on our KIRSCH-DATANET software solution and our KIRSCH EVOLUTION CLOUD.

We also offer software training for KIRSCH-DATANET so that you are familiar with all the functions and can configure and operate the software correctly.

Remote maintenance

With our Teamviewer, we offer you a platform for secure remote access and remote maintenance. This enables our experts to diagnose and solve problems or make adjustments without having to be at the location of the computer in question.

On-site instruction service

We teach you how to use your Kirsch refrigerators and freezers safely with our instruction service. We cover important points such as appliance design, operation, correct handling of alarms, cleaning and maintenance.

Qualification service for Kirsch appliances

- IQ - Installation qualification
- OQ - Operation qualification
- PQ - Performance qualification

Our service - your benefit

- Fast response times
- Competent assistance
- Specialised personnel



*PC-KIT-NET

Accessories

KIRSCH refrigerators and freezers provide numerous equipment options that can be retrofitted even at customer location.



KIRSCH EVOLUTION CLOUD-Module

Maximum storage safety through optimal connectivity and real-time monitoring.



PC-KIT-NET

Automatic temperature documentation and monitoring via your network (LAN connection).



KIRSCH-DATALOG

Retrofitting the automatic temperature documentation and monitoring system on third party devices and devices without an RS485 interface.



Vario Support

For comfortable and quick refilling.




Lockable drawer (top)

Protects sensitive goods from unauthorized access.




Wire shelves

Robust shelves with a load capacity of up to 40 and 50 kg.



External PT100/PT1000 with cold block

Additional temperature sensor for connection to existing/external monitoring system.

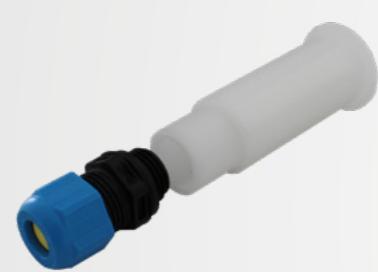

Access Port

Simple insertion of an external temperature sensor with integrated cable feed-through.




Clean room set

Enables operation in clean room thanks to special air guidance system of the cooling machine. 500/700 liter models also with HEPA filter.



Additional cooling machine fan

Is required when the on-site ventilation of the cooling machine is not sufficient (built-in device). Please see installation drawing.

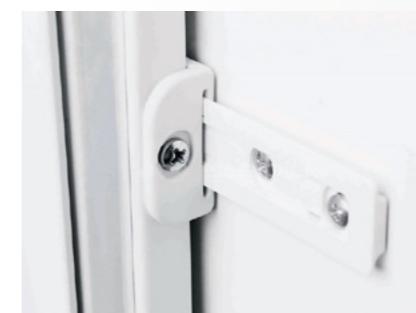

Door coupling

Connects the furniture door to the device door.



Decorative frame

Made of stainless steel, allows to cover door with a decorative panel (thickness max. 2 mm).



Glass door with lock

See clearly: avoid opening the door unnecessarily to inspect the contents. Lockable.



Side wall/ceiling interior lighting

Optional, optimal and energy-efficient lighting for the interior using an LED light strip.



Equipped with castors

Equipped with steering and fixed castors. (depending on the model).

По вопросам продаж и поддержки обращайтесь:

Алматы (727)345-47-04
Ангарск (3955)60-70-56
Архангельск (8182)63-90-72
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Благовещенск (4162)22-76-07
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Владикавказ (8672)28-90-48
Владимир (4922)49-43-18
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Иркутск (395)279-98-46
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Коломна (4966)23-41-49
Кострома (4942)77-07-48
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Курган (3522)50-90-47
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Ноябрьск (3496)41-32-12
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16
Петрозаводск (8142)55-98-37
Псков (8112)59-10-37
Пермь (342)205-81-47

Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Саранск (8342)22-96-24
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13
Сургут (3462)77-98-35
Сыктывкар (8212)25-95-17
Тамбов (4752)50-40-97
Тверь (4822)63-31-35

Тольятти (8482)63-91-07
Томск (3822)98-41-53
Тула (4872)33-79-87
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Улан-Удэ (3012)59-97-51
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Чебоксары (8352)28-53-07
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Чита (3022)38-34-83
Якутск (4112)23-90-97
Ярославль (4852)69-52-93

Россия +7(495)268-04-70

Казахстан +7(727)345-47-04

Беларусь +(375)257-127-88

Узбекистан +998(71)205-18-59

Киргизия +996(312)96-26-47